

## Data Sheet PCA-30-10-10-1040

Photoconductive THz antenna for laser excitation wavelength ~ 1040 nm  
and Butterfly structure



PCA – Photo Conductive Antenna

### Table of Contents

	Page
<b>1</b>	<b>Mounting Options</b> ..... <b>1</b>
<b>2</b>	<b>PCA Specification</b> ..... <b>2</b>
2.1	PCA-30-10-10-1040-0 ..... 2
2.2	PCA-30-10-10-1040-h ..... 3
2.3	PCA-30-10-10-1040h-l ..... 4
2.4	PCA-30-10-10-1040-h-f ..... 5
2.5	PCA-30-10-10-1040-c ..... 6
2.6	PCA-30-10-10-1040-c-l ..... 7
2.7	PCA-30-10-10-1040-c-f ..... 8
2.8	PCA-30-10-10-1040-a ..... 9
2.9	PCA-30-10-10-1040-a-l ..... 10
2.10	PCA-30-10-10-1040-a-f ..... 11
<b>3</b>	<b>Application Note</b> ..... <b>12</b>
3.1	Measurement Setup ..... 12
3.2	PCA Design ..... 12
<b>4</b>	<b>Contact Details</b> ..... <b>13</b>

## 1 Mounting Options

PCA-30-10-10-1040-0	Unmounted PCA chip
PCA-30-10-10-1040-h	Mounted on hyperhemispherical Si lens
PCA-30-10-10-1040-h-l	Mounted on hyperhemispherical Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
PCA-30-10-10-1040-h-f	Mounted on hyperhemispherical Si lens <b>plus</b> Adjusted optical fiber
PCA-30-10-10-1040-c	Mounted on collimating aspheric Si lens
PCA-30-10-10-1040-c-l	Mounted on collimating aspheric Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
PCA-30-10-10-1040-c-f	Mounted on collimating aspheric Si lens <b>plus</b> Adjusted optical fiber
PCA-30-10-10-1040-a	Mounted on aspheric focusing Si lens
PCA-30-10-10-1040-a-l	Mounted on aspheric focusing Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
PCA-30-10-10-1040-a-f	Mounted on aspheric focusing Si lens <b>plus</b> Adjusted optical fiber

## Nomenclature

PCA-30-10-10-1040-X-Y

PCA-30-10-10-1040-X-Y	Antenna design	Butterfly
PCA-30-10-10-1040-X-Y	Antenna length	30 $\mu\text{m}$
PCA-30-10-10-1040-X-Y	Gap distance	10 $\mu\text{m}$
PCA-30-10-10-1040-X-Y	Gap width	10 $\mu\text{m}$
PCA-30-10-10-1040-X-Y	Excitation wavelength	1040 nm
PCA-30-10-10-1040-X-Y	Mounted Si lens	0 / h / c / a
PCA-30-10-10-1040-X-Y	Adjusted	l / f

## 2 PCA Specification

### 2.1 PCA-30-10-10-1040-0

- Unmounted PCA chip

Table 1: Specification PCA-30-10-10-1040-0

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	10 μm	12 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>1</sup>		> 5 GΩ	-	-
Parameter		Typical		
PCA chip	Width	2 mm ± 0.2 mm		
	Depth	2 mm ± 0.2 mm		
	Height	625 μm ± 25 μm		
THz Beam	Focal length	Dot source		

<sup>1</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

## 2.2 PCA-30-10-10-1040-h

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)

Table 2: Specification PCA-30-10-10-1040-h

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	10 μm	12 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>2</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 9.5 mm		
THz Beam	Virtual focal length <sup>3</sup>	26.5 mm		
	Divergence angle	17°		

<sup>2</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>3</sup> Measured from the apex

## 2.3 PCA-30-10-10-1040h-I

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted focusing optical lens for free space laser excitation

Table 3: Specification PCA-30-10-10-1040-h-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>4</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>5</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 20.9 mm		
THz Beam	Virtual focal length <sup>6</sup>	26.5 mm		
	Divergence angle	17°		

<sup>4</sup> Collimated laser beam

<sup>5</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>6</sup> Measured from the apex

## 2.4 PCA-30-10-10-1040-h-f

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted optical fiber

Table 4: Specification PCA-30-10-10-1040-h-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>7</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>8</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Virtual focal length <sup>9</sup>	26.5 mm		
	Divergence angle	17°		

<sup>7</sup> Collimated laser beam

<sup>8</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>9</sup> Measured from the apex

## 2.5 PCA-30-10-10-1040-c

- Mounted on collimating Si lens (LSA-D20-T13.77)

Table 5: Specification PCA-30-10-10-1040-c

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	10 μm	12 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>10</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length <sup>11</sup>	∞		
	FWHM <sup>12</sup>	11.0 mm		

<sup>10</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>11</sup> Measured from the apex

<sup>12</sup> Full Width at Half Maximum

## 2.6 PCA-30-10-10-1040-c-I

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted focusing optical lens for free space laser excitation

Table 6: Specification PCA-30-10-10-1040-c-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>13</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>14</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length <sup>15</sup>	∞		
	FWHM <sup>16</sup>	11.0 mm		

<sup>13</sup> Collimated laser beam

<sup>14</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>15</sup> Measured from the apex

<sup>16</sup> Full Width at Half Maximum



## 2.7 PCA-30-10-10-1040-c-f

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted optical fiber

Table 7: Specification PCA-30-10-10-1040-c-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>17</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>18</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length <sup>19</sup>	∞		
	FWHM <sup>20</sup>	11.0 mm		

<sup>17</sup> Collimated laser beam

<sup>18</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>19</sup> Measured from the apex

<sup>20</sup> Full Width at Half Maximum

## 2.8 PCA-30-10-10-1040-a

- Mounted on focusing Si lens (LSA-D20-T14-F50)

Table 8: Specification PCA-30-10-10-1040-a

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	10 μm	12 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>21</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length <sup>22</sup>	50.0 mm		
	Convergence angle	10°		

<sup>21</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>22</sup> Measured from the apex

## 2.9 PCA-30-10-10-1040-a-I

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted focusing optical lens for free space laser excitation

Table 9: Specification PCA-30-10-10-1040-a-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>23</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>24</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length <sup>25</sup>	50.0 mm		
	Convergence angle	10°		

<sup>23</sup> Collimated laser beam

<sup>24</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>25</sup> Measured from the apex

## 2.10 PCA-30-10-10-1040-a-f

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted optical fiber

Table 10: Specification PCA-30-10-10-1040-a-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	30 mW	40 mW
	Avg. power density	-	-	35 000 W/cm <sup>2</sup>
	Fluence	-	-	500 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>26</sup>	-	0.9 mm	1.1 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	40 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>27</sup>		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length <sup>28</sup>	50.0 mm		
	Convergence angle	10°		

<sup>26</sup> Collimated laser beam

<sup>27</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>28</sup> Measured from the apex

### 3 Application Note

#### 3.1 Measurement Setup

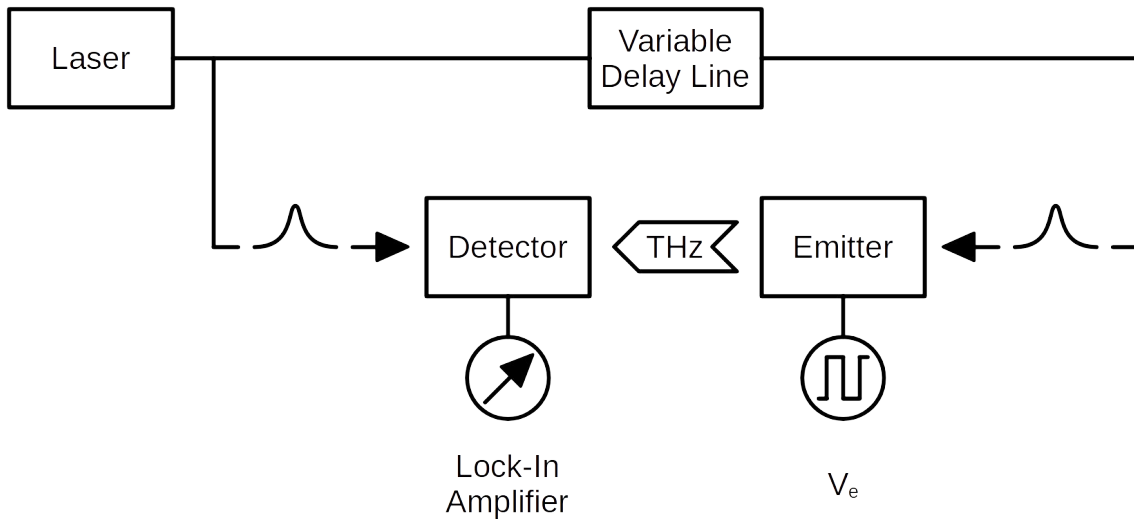


Figure 1: Setup for THz measurements

#### 3.2 PCA Design

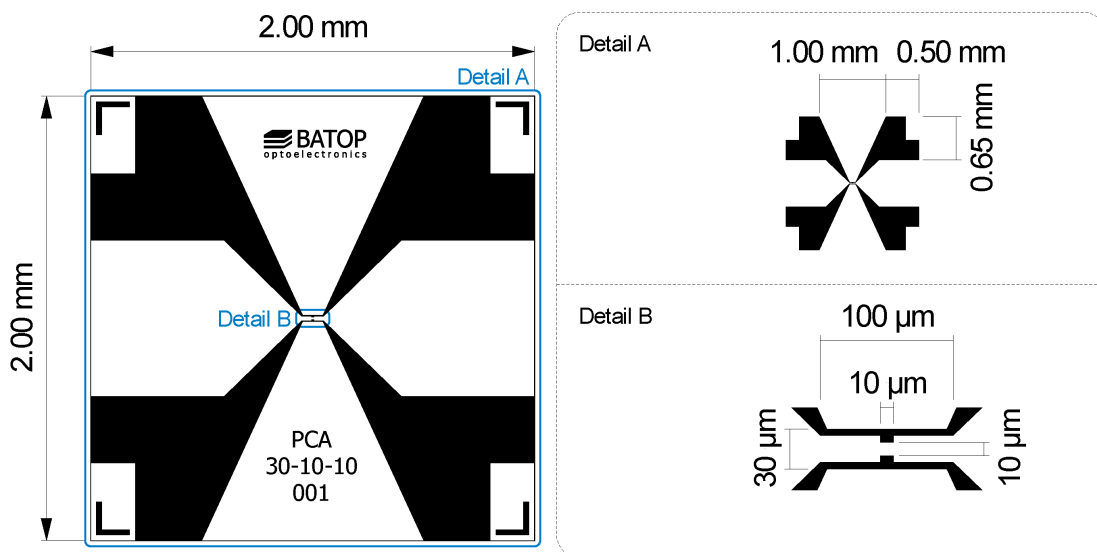


Figure 2: PCA dimensions

Antenna length = 30 μm / Gap distance = 10 μm / Gap width = 10 μm

## 4 Contact Details

BATOP GmbH  
Stockholmer Straße 14  
07747 Jena  
Germany

E-Mail: info@batop.de (Sales)  
          thz@batop.de (Support)  
Phone: 0049 3641 634009 0