

Data Sheet PCA-44-06-10-1040

Photoconductive THz antenna for laser excitation wavelength ~ 1040 nm
and Butterfly structure



PCA – Photo Conductive Antenna

Table of Contents

	Page
1 Mounting Options	1
2 PCA Specification	2
2.1 PCA-44-06-10-1040-0	2
2.2 PCA-44-06-10-1040-h	3
2.3 PCA-44-06-10-1040h-l	4
2.4 PCA-44-06-10-1040-h-f	5
2.5 PCA-44-06-10-1040-c	6
2.6 PCA-44-06-10-1040-c-l	7
2.7 PCA-44-06-10-1040-c-f	8
2.8 PCA-44-06-10-1040-a	9
2.9 PCA-44-06-10-1040-a-l	10
2.10 PCA-44-06-10-1040-a-f	11
3 Application Note	12
3.1 Measurement Setup	12
3.2 PCA Design	12
4 Contact Details	13

1 Mounting Options

PCA-44-06-10-1040-0	Unmounted PCA chip
PCA-44-06-10-1040-h	Mounted on hyperhemispherical Si lens
PCA-44-06-10-1040-h-l	Mounted on hyperhemispherical Si lens plus Adjusted focusing optical lens for free space laser excitation
PCA-44-06-10-1040-h-f	Mounted on hyperhemispherical Si lens plus Adjusted optical fiber
PCA-44-06-10-1040-c	Mounted on collimating aspheric Si lens
PCA-44-06-10-1040-c-l	Mounted on collimating aspheric Si lens plus Adjusted focusing optical lens for free space laser excitation
PCA-44-06-10-1040-c-f	Mounted on collimating aspheric Si lens plus Adjusted optical fiber
PCA-44-06-10-1040-a	Mounted on aspheric focusing Si lens
PCA-44-06-10-1040-a-l	Mounted on aspheric focusing Si lens plus Adjusted focusing optical lens for free space laser excitation
PCA-44-06-10-1040-a-f	Mounted on aspheric focusing Si lens plus Adjusted optical fiber

Nomenclature

PCA-44-06-10-1040-X-Y

PCA-44-06-10-1040-X-Y	Antenna design	Butterfly
PCA-44-06-10-1040-X-Y	Antenna length	44 μm
PCA-44-06-10-1040-X-Y	Gap distance	06 μm
PCA-44-06-10-1040-X-Y	Gap width	10 μm
PCA-44-06-10-1040-X-Y	Excitation wavelength	1040 nm
PCA-44-06-10-1040-X-Y	Mounted Si lens	0 / h / c / a
PCA-44-06-10-1040-X-Y	Adjusted	l / f

2 PCA Specification

2.1 PCA-44-06-10-1040-0

- Unmounted PCA chip

Table 1: Specification PCA-44-06-10-1040-0

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	6 μm	8 μm	-
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ¹		> 5 GΩ	-	-
Parameter		Typical		
PCA chip	Width	2 mm ± 0.2 mm		
	Depth	2 mm ± 0.2 mm		
	Height	625 μm ± 25 μm		
THz Beam	Focal length	Dot source		

¹ Measurement conditions: room temperature & measuring voltage of 3.3 V

2.2 PCA-44-06-10-1040-h

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)

Table 2: Specification PCA-44-06-10-1040-h

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	6 μm	8 μm	-
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ²		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 9.5 mm		
THz Beam	Virtual focal length ³	26.5 mm		
	Divergence angle	17°		

² Measurement conditions: room temperature & measuring voltage of 3.3 V

³ Measured from the apex

2.3 PCA-44-06-10-1040h-I

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted focusing optical lens for free space laser excitation

Table 3: Specification PCA-44-06-10-1040-h-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ⁴	-	1.3 mm	1.8 mm
Bias source	Voltage [V _b]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ⁵		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 20.9 mm		
THz Beam	Virtual focal length ⁶	26.5 mm		
	Divergence angle	17°		

⁴ Collimated laser beam

⁵ Measurement conditions: room temperature & measuring voltage of 3.3 V

⁶ Measured from the apex

2.4 PCA-44-06-10-1040-h-f

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted optical fiber

Table 4: Specification PCA-44-06-10-1040-h-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ⁷	-	1.3 mm	1.8 mm
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ⁸		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Virtual focal length ⁹	26.5 mm		
	Divergence angle	17°		

⁷ Collimated laser beam

⁸ Measurement conditions: room temperature & measuring voltage of 3.3 V

⁹ Measured from the apex

2.5 PCA-44-06-10-1040-c

- Mounted on collimating Si lens (LSA-D20-T13.77)

Table 5: Specification PCA-44-06-10-1040-c

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	6 μm	8 μm	-
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ¹⁰		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length ¹¹	∞		
	FWHM ¹²	11.0 mm		

¹⁰ Measurement conditions: room temperature & measuring voltage of 3.3 V

¹¹ Measured from the apex

¹² Full Width at Half Maximum

2.6 PCA-44-06-10-1040-c-I

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted focusing optical lens for free space laser excitation

Table 6: Specification PCA-44-06-10-1040-c-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ¹³	-	1.3 mm	1.8 mm
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ¹⁴		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length ¹⁵	∞		
	FWHM ¹⁶	11.0 mm		

¹³ Collimated laser beam

¹⁴ Measurement conditions: room temperature & measuring voltage of 3.3 V

¹⁵ Measured from the apex

¹⁶ Full Width at Half Maximum

2.7 PCA-44-06-10-1040-c-f

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted optical fiber

Table 7: Specification PCA-44-06-10-1040-c-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ¹⁷	-	1.3 mm	1.8 mm
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ¹⁸		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length ¹⁹	∞		
	FWHM ²⁰	11.0 mm		

¹⁷ Collimated laser beam

¹⁸ Measurement conditions: room temperature & measuring voltage of 3.3 V

¹⁹ Measured from the apex

²⁰ Full Width at Half Maximum

2.8 PCA-44-06-10-1040-a

- Mounted on focusing Si lens (LSA-D20-T14-F50)

Table 8: Specification PCA-44-06-10-1040-a

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	6 μm	8 μm	-
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ²¹		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length ²²	50.0 mm		
	Convergence angle	10°		

²¹ Measurement conditions: room temperature & measuring voltage of 3.3 V

²² Measured from the apex

2.9 PCA-44-06-10-1040-a-I

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted focusing optical lens for free space laser excitation

Table 9: Specification PCA-44-06-10-1040-a-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ²³	-	1.3 mm	1.8 mm
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ²⁴		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length ²⁵	50.0 mm		
	Convergence angle	10°		

²³ Collimated laser beam

²⁴ Measurement conditions: room temperature & measuring voltage of 3.3 V

²⁵ Measured from the apex

2.10 PCA-44-06-10-1040-a-f

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted optical fiber

Table 10: Specification PCA-44-06-10-1040-a-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	1030 nm	1040 nm	1050 nm
	Avg. optical power	-	20 mW	30 mW
	Avg. power density	-	-	60 000 W/cm ²
	Fluence	-	-	850 μJ/cm ²
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter ²⁶	-	1.3 mm	1.8 mm
Bias source	Voltage [V _e]	-	-	30 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R _d] ²⁷		> 5 GΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length ²⁸	50.0 mm		
	Convergence angle	10°		

²⁶ Collimated laser beam

²⁷ Measurement conditions: room temperature & measuring voltage of 3.3 V

²⁸ Measured from the apex

3 Application Note

3.1 Measurement Setup

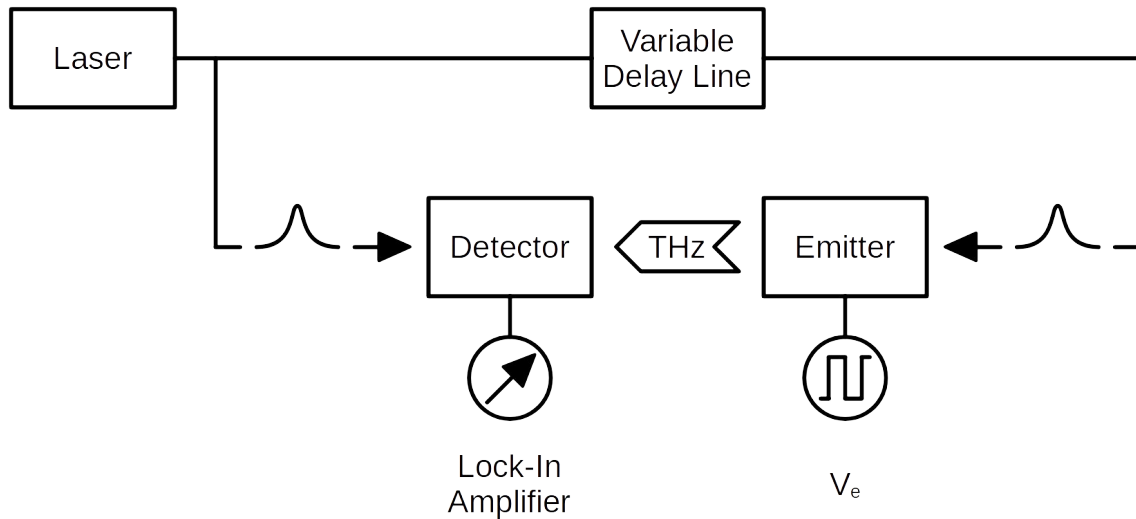


Figure 1: Setup for THz measurements

3.2 PCA Design

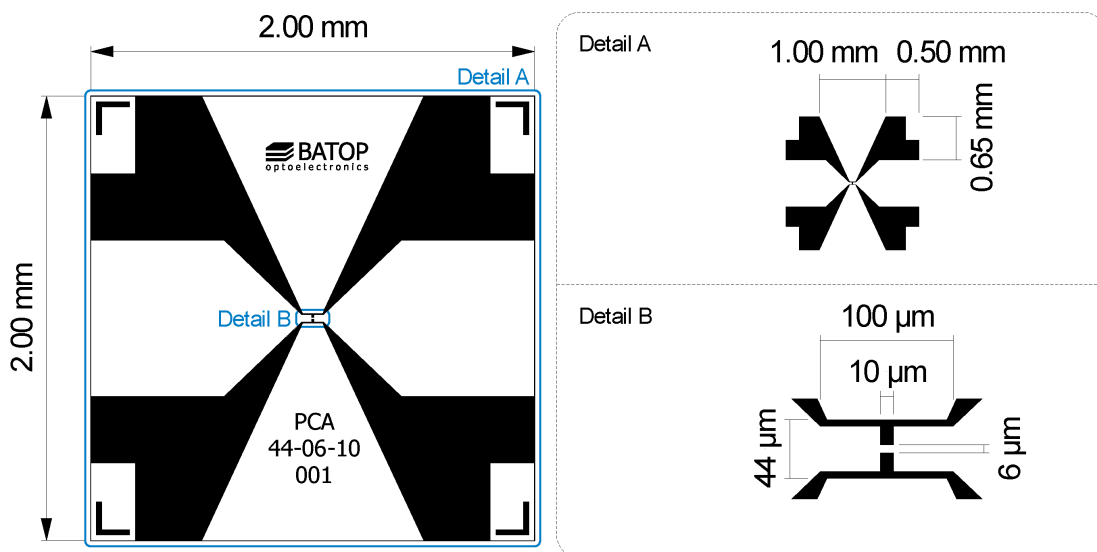


Figure 2: PCA dimensions

Antenna length = 44 μm / Gap distance = 6 μm / Gap width = 10 μm

4 Contact Details

BATOP GmbH
Stockholmer Straße 14
07747 Jena
Germany

E-Mail: info@batop.de (Sales)
 thz@batop.de (Support)
Phone: 0049 3641 634009 0