

## Data Sheet sPCA-5Pi-05-3000-1060

Photoconductive THz antenna for laser excitation wavelength ~ 1060 nm  
and [Logarithmic spiral](#) structure



PCA – Photo Conductive Antenna

<b>Table of Contents</b>		<b>Page</b>
<b>1</b>	<b>Mounting Options</b> .....	<b>1</b>
<b>2</b>	<b>PCA Specification</b> .....	<b>2</b>
2.1	sPCA-5Pi-05-3000-1060-0 .....	2
2.2	sPCA-5Pi-05-3000-1060-h .....	3
2.3	sPCA-5Pi-05-3000-1060h-l .....	4
2.4	sPCA-5Pi-05-3000-1060-h-f .....	5
2.5	sPCA-5Pi-05-3000-1060-c .....	6
2.6	sPCA-5Pi-05-3000-1060-c-l .....	7
2.7	sPCA-5Pi-05-3000-1060-c-f .....	8
2.8	sPCA-5Pi-05-3000-1060-a .....	9
2.9	sPCA-5Pi-05-3000-1060-a-l .....	10
2.10	sPCA-5Pi-05-3000-1060-a-f .....	11
<b>3</b>	<b>Application Note</b> .....	<b>12</b>
3.1	Measurement Setup .....	12
3.2	PCA Design .....	12
3.3	PCA Performance .....	13
<b>4</b>	<b>Contact Details</b> .....	<b>14</b>

## 1 Mounting Options

sPCA-5Pi-05-3000-1060-0	Unmounted PCA chip
sPCA-5Pi-05-3000-1060-h	Mounted on hyperhemispherical Si lens
sPCA-5Pi-05-3000-1060-h-l	Mounted on hyperhemispherical Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
sPCA-5Pi-05-3000-1060-h-f	Mounted on hyperhemispherical Si lens <b>plus</b> Adjusted optical fiber
sPCA-5Pi-05-3000-1060-c	Mounted on collimating aspheric Si lens
sPCA-5Pi-05-3000-1060-c-l	Mounted on collimating aspheric Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
sPCA-5Pi-05-3000-1060-c-f	Mounted on collimating aspheric Si lens <b>plus</b> Adjusted optical fiber
sPCA-5Pi-05-3000-1060-a	Mounted on aspheric focusing Si lens
sPCA-5Pi-05-3000-1060-a-l	Mounted on aspheric focusing Si lens <b>plus</b> Adjusted focusing optical lens for free space laser excitation
sPCA-5Pi-05-3000-1060-a-f	Mounted on aspheric focusing Si lens <b>plus</b> Adjusted optical fiber

## Nomenclature

sPCA-5Pi-05-3000-1060-X-Y

sPCA-5Pi-05-3000-1060-X-Y	Antenna design	Logarithmic spiral
sPCA-5Pi-05-3000-1060-X-Y	Spiral angle	5Pi
sPCA-5Pi-05-3000-1060-X-Y	Gap distance	05 µm
sPCA-5Pi-05-3000-1060-X-Y	Spiral diameter	3000 µm
sPCA-5Pi-05-3000-1060-X-Y	Excitation wavelength	1060 nm
sPCA-5Pi-05-3000-1060-X-Y	Mounted Si lens	0 / h / c / a
sPCA-5Pi-05-3000-1060-X-Y	Adjusted	l / f

## 2 PCA Specification

### 2.1 sPCA-5Pi-05-3000-1060-0

- Unmounted PCA chip

Table 1: Specification sPCA-5Pi-05-3000-1060-0

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	5 μm	6 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>1</sup>		> 80 MΩ	-	-
Parameter		Typical		
PCA chip	Width	4 mm ± 0.2 mm		
	Depth	4 mm ± 0.2 mm		
	Height	625 μm ± 25 μm		
THz Beam	Focal length	Dot source		

<sup>1</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

## 2.2 sPCA-5Pi-05-3000-1060-h

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)

Table 2: Specification sPCA-5Pi-05-3000-1060-h

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	5 μm	6 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>2</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 9.5 mm		
THz Beam	Virtual focal length <sup>3</sup>	26.5 mm		
	Divergence angle	17°		

<sup>2</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>3</sup> Measured from the apex

### 2.3 sPCA-5Pi-05-3000-1060h-I

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted focusing optical lens for free space laser excitation

Table 3: Specification sPCA-5Pi-05-3000-1060-h-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>4</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>5</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 20.9 mm		
THz Beam	Virtual focal length <sup>6</sup>	26.5 mm		
	Divergence angle	17°		

<sup>4</sup> Collimated laser beam

<sup>5</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>6</sup> Measured from the apex

## 2.4 sPCA-5Pi-05-3000-1060-h-f

- Mounted on hyperhemispherical Si lens (LSH-D12-T7.13)
- Adjusted optical fiber

Table 4: Specification sPCA-5Pi-05-3000-1060-h-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>7</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>8</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Virtual focal length <sup>9</sup>	26.5 mm		
	Divergence angle	17°		

<sup>7</sup> Collimated laser beam

<sup>8</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>9</sup> Measured from the apex

## 2.5 sPCA-5Pi-05-3000-1060-c

- Mounted on collimating Si lens (LSA-D20-T13.77)

Table 5: Specification sPCA-5Pi-05-3000-1060-c

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	5 μm	6 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>10</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length <sup>11</sup>	∞		
	FWHM <sup>12</sup>	11.0 mm		

<sup>10</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>11</sup> Measured from the apex

<sup>12</sup> Full Width at Half Maximum

## 2.6 sPCA-5Pi-05-3000-1060-c-I

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted focusing optical lens for free space laser excitation

Table 6: Specification sPCA-5Pi-05-3000-1060-c-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>13</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>14</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length <sup>15</sup>	∞		
	FWHM <sup>16</sup>	11.0 mm		

<sup>13</sup> Collimated laser beam

<sup>14</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>15</sup> Measured from the apex

<sup>16</sup> Full Width at Half Maximum



## 2.7 sPCA-5Pi-05-3000-1060-c-f

- Mounted on collimating Si lens (LSA-D20-T13.77)
- Adjusted optical fiber

Table 7: Specification sPCA-5Pi-05-3000-1060-c-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>17</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>18</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length <sup>19</sup>	∞		
	FWHM <sup>20</sup>	11.0 mm		

<sup>17</sup> Collimated laser beam

<sup>18</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>19</sup> Measured from the apex

<sup>20</sup> Full Width at Half Maximum

## 2.8 sPCA-5Pi-05-3000-1060-a

- Mounted on focusing Si lens (LSA-D20-T14-F50)

Table 8: Specification sPCA-5Pi-05-3000-1060-a

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Spot diameter	5 μm	6 μm	-
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>21</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 16.0 mm		
THz Beam	Focal length <sup>22</sup>	50.0 mm		
	Convergence angle	10°		

<sup>21</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>22</sup> Measured from the apex

## 2.9 sPCA-5Pi-05-3000-1060-a-I

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted focusing optical lens for free space laser excitation

Table 9: Specification sPCA-5Pi-05-3000-1060-a-I

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>23</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>24</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 25.4 mm Min. length 25.0 mm		
THz Beam	Focal length <sup>25</sup>	50.0 mm		
	Convergence angle	10°		

<sup>23</sup> Collimated laser beam

<sup>24</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>25</sup> Measured from the apex

## 2.10 sPCA-5Pi-05-3000-1060-a-f

- Mounted on focusing Si lens (LSA-D20-T14-F50)
- Adjusted optical fiber

Table 10: Specification sPCA-5Pi-05-3000-1060-a-f

Parameter		Min	Recommended	Max
Laser source	Wavelength	650 nm	1060 nm	1060 nm
	Avg. optical power	-	10 mW	20 mW
	Avg. power density	-	-	70 000 W/cm <sup>2</sup>
	Fluence	-	-	1 000 μJ/cm <sup>2</sup>
	Pulse duration	-	100 fs	200 fs
	Repetition rate	70 MHz	80 MHz	-
	Beam diameter <sup>26</sup>	-	1.8 mm	2.2 mm
Bias source	Voltage [V <sub>e</sub> ]	-	-	20 V
	Modulation frequency	0 Hz (Dc)	10 kHz	10 MHz
Dark resistance [R <sub>d</sub> ] <sup>27</sup>		> 80 MΩ	-	-
Parameter		Typical		
Package		Max. diameter 30.5 mm Min. length 54.6 mm (without fiber)		
THz Beam	Focal length <sup>28</sup>	50.0 mm		
	Convergence angle	10°		

<sup>26</sup> Collimated laser beam

<sup>27</sup> Measurement conditions: room temperature & measuring voltage of 3.3 V

<sup>28</sup> Measured from the apex

### 3 Application Note

#### 3.1 Measurement Setup

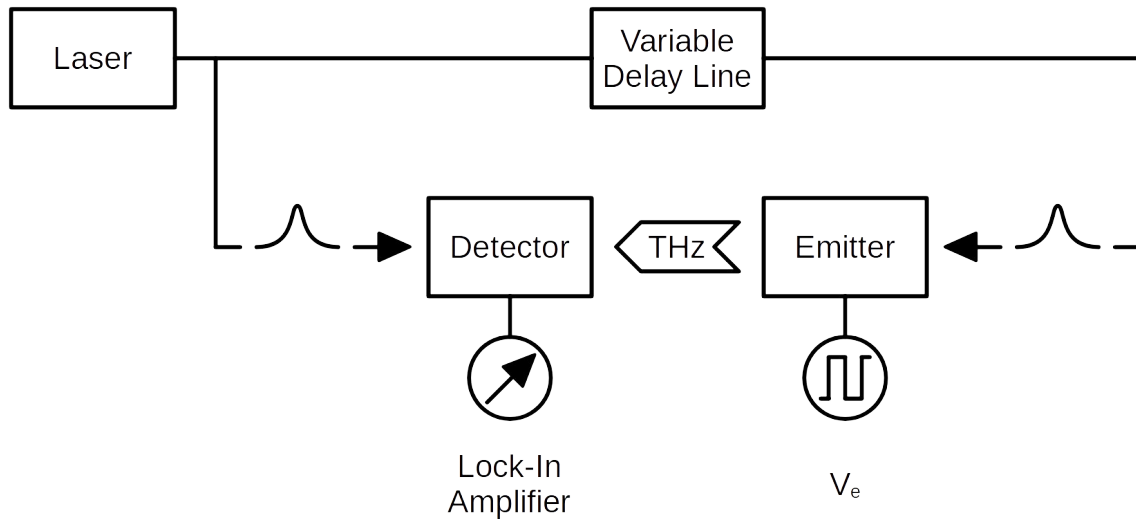


Figure 1: Setup for THz measurements

#### 3.2 PCA Design

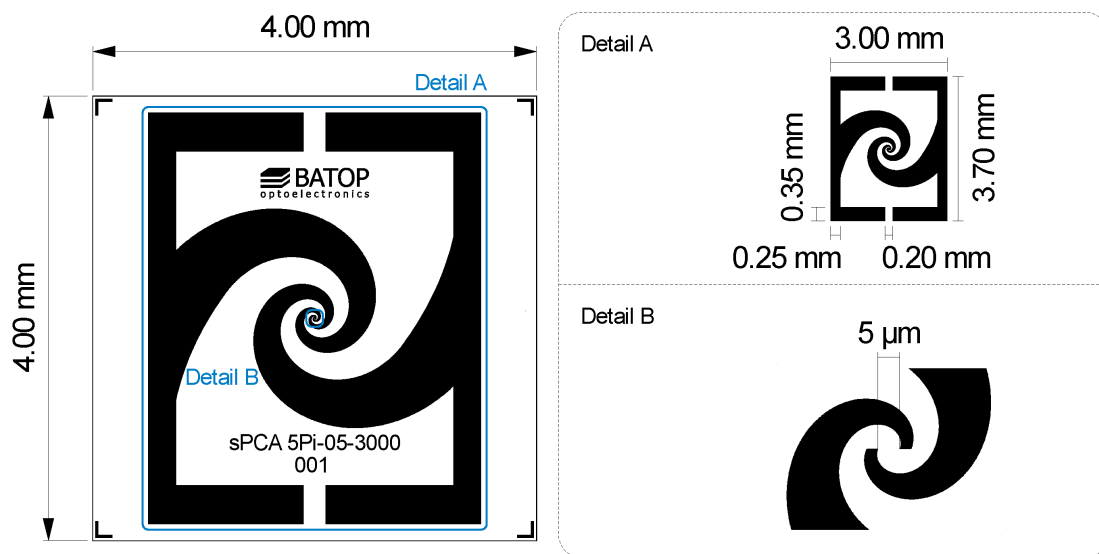


Figure 2: PCA dimensions

Spiral angle =  $5\pi$  / Gap distance =  $05 \mu\text{m}$  / Spiral diameter =  $3000 \mu\text{m}$

### 3.3 PCA Performance

Performance of the PCA combination:

sPCA-5Pi-05-3000-1060 (Emitter & Detector)

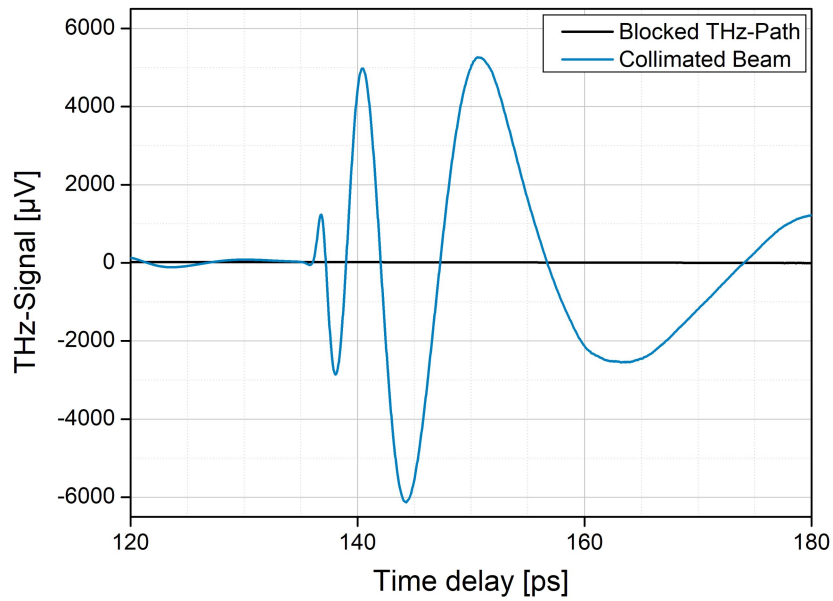


Figure 3: THz signal

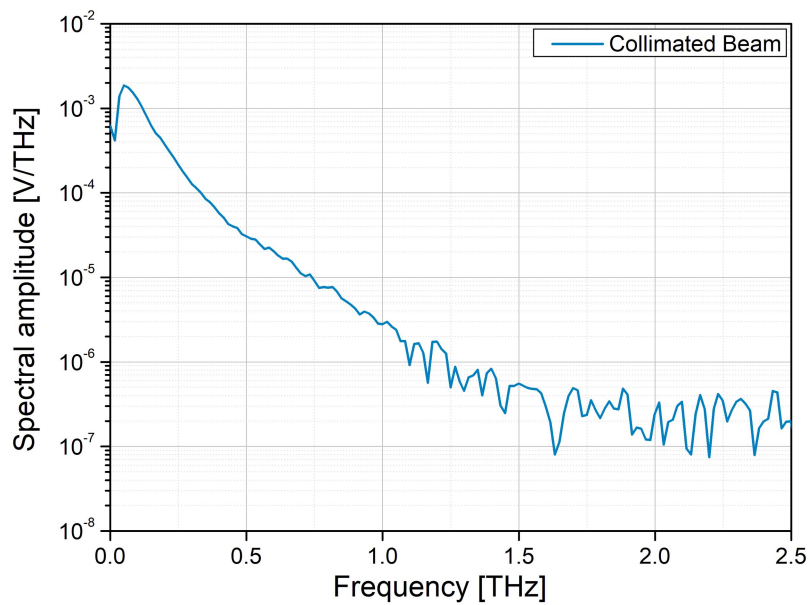


Figure 4: THz spectrum

## 4 Contact Details

BATOP GmbH  
Stockholmer Straße 14  
07747 Jena  
Germany

E-Mail: info@batop.de (Sales)  
          thz@batop.de (Support)  
Phone: 0049 3641 634009 0